

CONNECTOR


PIN #

- 1 POWER GROUND
- 2 +12 OR +28 VOLT POWER INPUT (FUSE AT 1/2 AMP)
- 3 A1
- 4 A2
- 5 A4
- 6 B1
- 7 B2
- 8 B4
- 9 C1
- 10 C2
- 11 C4
- 12 D4

TO ENCODER OR TRANSPONDER
DATA LINES

- 13 GROUND SHIELD
- 14 ANALOG PROBE
BLACK OR WHT/BLU
- 15 ANALOG PROBE
RED OR WHITE

- DIGITAL PROBE WHT/BLU & SHIELD
- DIGITAL PROBE WHT/ORN
- DIGITAL PROBE WHITE
- UNITS WITH SERIAL NUMBERS
STARTING WITH THE LETTER "D"
USE THE DIGITAL PROBE

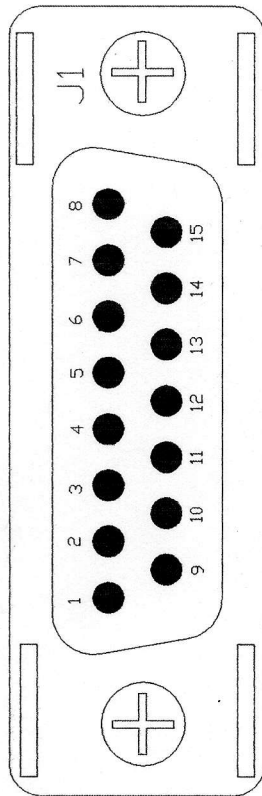

INPUT CONNECTOR REAR VIEW

NOTES:

- 1 TEMPERATURE SENSOR MOUNTING SHOULD BE IN A PLACE THAT WOULD BE FREE OF EXHAUST GASES OR COWL FLAPS AIRFLOW. AN IDEAL PLACE IS 2 FEET OUT FROM WING ROOT ON THE BOTTOM OF THE WING.

REVISIONS

NO	DATE	BY
1	10/13/09	RGW
2		
3		
4		
5		

655 ELECTRICAL



427 HILLCREST WAY
REDWOOD CITY, CA 94062

DRAWN BY	SCALE	MATERIAL
RGW	NONE	
CHK'D	DATE	DRAWING NO.
	6/6/85	655-013
TRACED	APP'D	DNT